



BELT CONVEYORS




GB-17.07.17



2.0 M




3.3 M

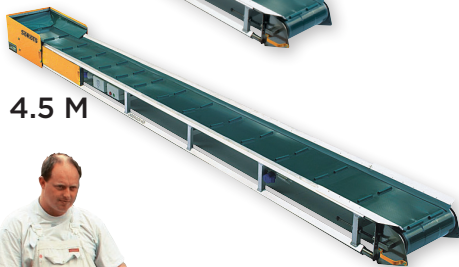

4.5 M



6.0 M

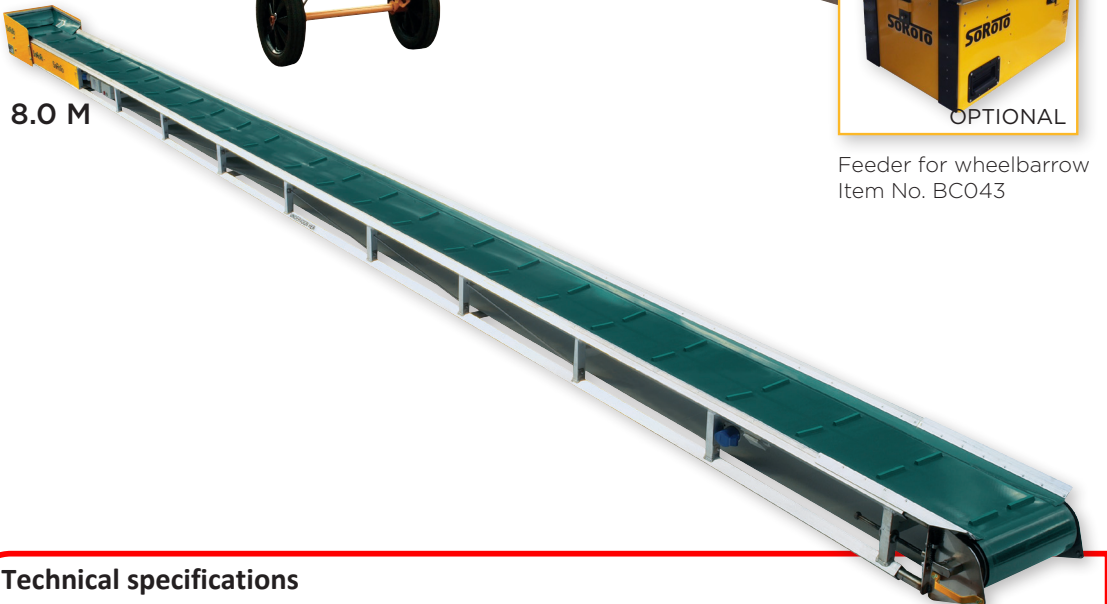

8.0 M



Undercarriage
Item No. BC041



Truck pockets / 2 pcs
Item No. BC075



Feeder for wheelbarrow
Item No. BC043

- Move 322 tons per day – and save time!
- Easy to operate
- Lightweight – yet robust
- Low maintenance and easy to clean
- Undercarriage and standard feeder box is incl.
- PVC belt with or without carriers

The lightweight SoRoTo belt conveyors have an aluminium frame and stainless steel runners.

For professional use as well as DIY.

Is serial connection ready.

No limit to what you can move with a SoRoTo belt conveyor

Item No. 2000



Item No. 3300



Item No. 4500



Item No. 6000



Item No. 8000



Technical specifications

Belt Conveyor	2.0 m	3.3 m	4.5 m	6.0 m	8.0 m
Weight incl. Undercarriage	55 kg	78 kg	88 kg	106 kg	139 kg
Length	2.2 metres	3.3 metres	4.7 metres	6.2 metres	8.1 metres
Max. Amp	4 Amp	4 Amp	6 Amp	6 Amp	6 Amp
Motor	0.50 kW	0.50 kW	0.50 kW	0.55 kW	0.55 kW
Width	48 cm	48 cm	48 cm	48 cm	48 cm
Height	23 cm	23 cm	23 cm	23 cm	23 cm
Lifting height	30°/45°	30°/45°	30°/45°	30°/45°	30°/45°
Band speed	32 cm/sek	32 cm/sek	32 cm/sek	32 cm/sek	32 cm/sek
Power	CEE	CEE	CEE	CEE	CEE
Standard belt	PVC	PVC	PVC	PVC	PVC

For further details
- turn the page...



INCLINATION



GB-17.07.17

